










Terminal Strips with Locking Slide 0.5 mm²/AWG 20 Pin Spacings 2.5 mm/0.098 in and 2.54 mm/0.1 in Series 218



CAGE CLAMP®

Pin spacing 2.5 mm / 0.098 in 0.08 – 0.5 mm ² ① AWG 28 – 20 ① 250 V/2.5 kV/2 150 V, 4 A I _N 6 A  5 – 6 mm / 0.22 in ② Approvals	Pin spacing 2.54 mm / 0.1 in 0.08 – 0.5 mm ² ① AWG 28 – 20 ① 250 V/2.5 kV/2 150 V, 4 A I _N 6 A  5 – 6 mm / 0.22 in ② Approvals	Accessories
--	---	--------------------



No. of poles	Item No.	PU	No. of poles	Item No.	PU	Accessories, Series 218	Item No.
1-conductor terminal strip with locking slide, 2 solder pins/pole in line, gray, locking slide, white			1-conductor terminal strip with locking slide, 2 solder pins/pole in line, gray, locking slide, white			Marker cards,	
2	218-102	1000 (10 x 100)	2	218-502	1000 (10 x 100)		100 self-adhesive strips per card
3	218-103	1000 (10 x 100)	3	218-503	1000 (10 x 100)	Spacing 2.5 mm/0.098 in	
4	218-104	500 (5 x 100)	4	218-504	500 (5 x 100)	1-16 (400x) 210-331/0250-0202	
5	218-105	500 (5 x 100)	5	218-505	500 (5 x 100)	17-32 (400x) 210-331/0250-0204	
6	218-106	280 (4 x 70)	6	218-506	280 (4 x 70)	Spacing 2.54 mm/0.1 in	
7	218-107	240 (4 x 60)	7	218-507	240 (4 x 60)	1-16 (400x) 210-331/0254-0202	
8	218-108	220 (4 x 55)	8	218-508	220 (4 x 55)	17-32 (400x) 210-331/0254-0204	
9	218-109	200 (4 x 50)	9	218-509	200 (4 x 50)		
10	218-110	180 (4 x 45)	10	218-510	180 (4 x 45)		
11	218-111	160 (4 x 40)	11	218-511	160 (4 x 40)		
12	218-112	140 (4 x 35)	12	218-512	140 (4 x 35)		
13	218-113	140 (4 x 35)	13	218-513	140 (4 x 35)	Direct printing on request	
14	218-114	120 (4 x 30)	14	218-514	120 (4 x 30)		
15	218-115	120 (4 x 30)	15	218-515	120 (4 x 30)	Test pin, Ø 1 mm/0.039 in,	
16	218-116	100 (4 x 25)	16	218-516	100 (4 x 25)		test wire for sold. onto test plug
:	:	:	:	:	:	735-500	
21	218-121	100 (4 x 25)	21	218-521	100 (4 x 25)	Operating tool, with partially insulated shaft,	
22	218-122	100 (4 x 25)	22	218-522	100 (4 x 25)		(2.5 x 0.4) mm/(0.098 x 0.016) in
23	218-123	100 (4 x 25)	23	218-523	100 (4 x 25)	210-719	
24	218-124	80 (4 x 20)	24	218-524	80 (4 x 20)		
Additional item numbers for colored terminal strips:			Ordering example:			Operating tool, partially insulated	
red	.../000-005		Terminal strips, pin spacing 2.5 mm/0.098 in, 8 poles,			233-335	
blue	.../000-006		orange			of insulating material	
orange	.../000-012		2 solder pins in line 218-108/000-012			233-332	
green	.../000-023						
locking slide, white							

Dimensions (in mm)

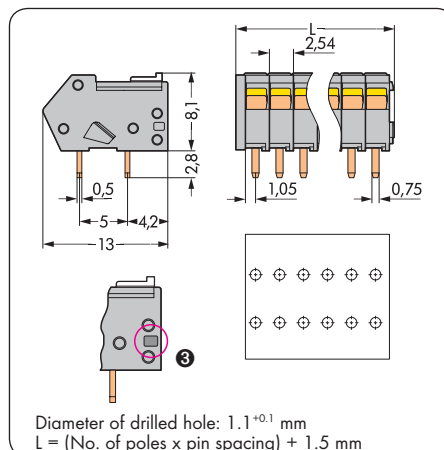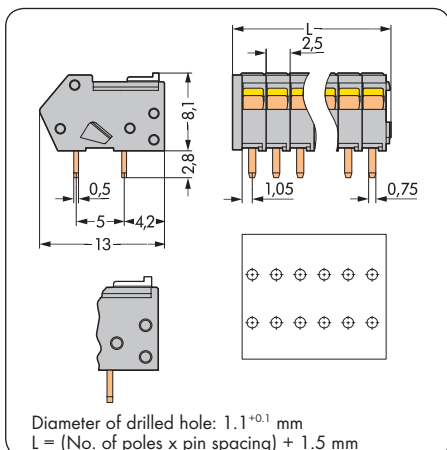

- ① in adjacent positions 0.75 mm²/AWG 18
- ③ A groove at the back of the terminal strip differentiates the two pin spacings.