




Spring plugs for pluggable terminal blocks / 0221 series

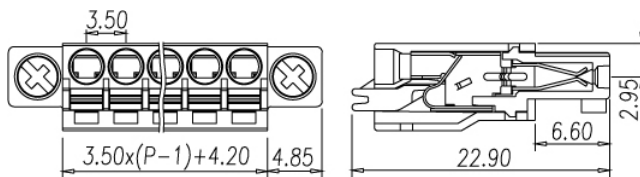

0221-28

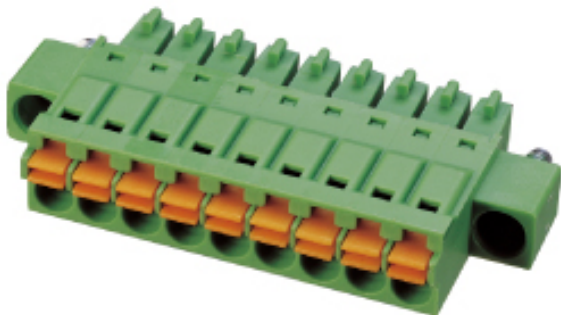

Pitch: 3.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	8A	6A
Wire range		1.0mm ²
Solid wire (AWG)	24~16	
Stranded wire (AWG/mm ²)	24~16	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (Lb-in)		
Screw		
Wire strip length	10mm	
Pole	Cat. No.	
02	0221-2802	
:	:	
:	:	
20	0221-2820	