



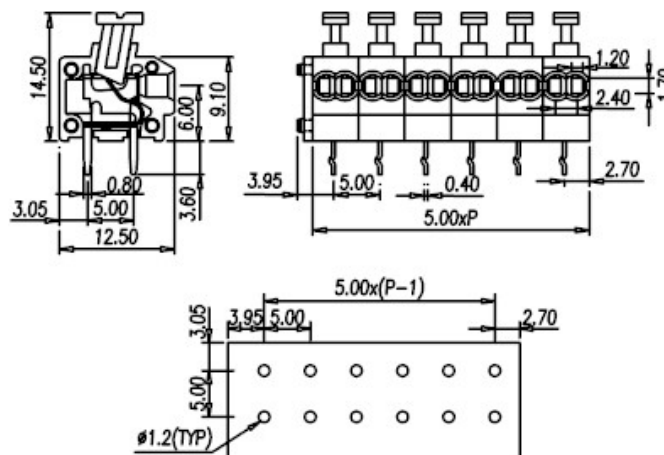

244RA

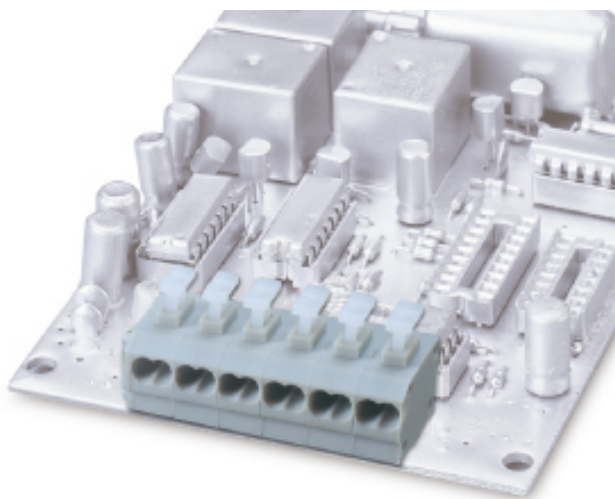

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	10A	12A
Wire range	0.75mm ²	
Solid wire (AWG)	24~18	
Stranded wire (AWG/mm ²)	24~18	
Rated surge voltage (UL/IEC/Max.)	1.6 / 3 / 3 KV	
Torque (Lb-in)		
Wire strip length	9~10mm	
End Cover	0056A4XX00	
Pole	Cat. No.	
02	244RA-02P	
:	:	
:	:	
24	244RA-24P	