


# DIN-Rail-Mountable Modules, Series 287 and 288 Interface Modules, Series 289

Relay direct soldered/Relay in socket		Interface module CAGE CLAMP® terminal strips (Series 236) Mounting carrier for DIN rail 35		Interface module CAGE CLAMP® terminal strips (Series 736 and 737) Mounting carrier for DIN rail 35	
0.08 – 2.5 mm <sup>2</sup>	AWG 28 – 14	0.08 – 2.5 mm <sup>2</sup>	AWG 28 – 12	0.08 – 2.5 mm <sup>2</sup>	AWG 28 – 12

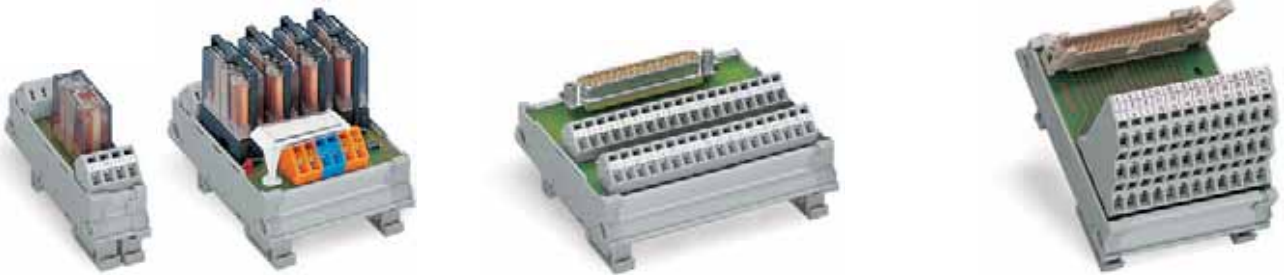

Item No.	PU	Item No.	PU	Item No.	PU
	<b>2 changeover contacts</b> Relay direct soldered <b>288-512</b> 1 UC 24 V / 6 A  <b>288-312</b> 1 DC 24 V / 6 A (no illustration)		<b>Interface module with header acc. to DIN 41651</b> <b>289-501</b> 10 poles 1 <b>289-502</b> 14 poles 1 <b>289-503</b> 16 poles 1 <b>289-504</b> 20 poles 1 <b>289-505</b> 26 poles 1 <b>289-506</b> 34 poles 1 <b>289-507</b> 40 poles 1 <b>289-508</b> 50 poles 1 <b>289-509</b> 64 poles 1		<b>Interface modules for ribbon cable connectors</b> <b>289-611</b> 10 poles 1 <b>289-612</b> 14 poles 1 <b>289-613</b> 16 poles 1 <b>289-614</b> 20 poles 1 <b>289-615</b> 26 poles 1 <b>289-616</b> 34 poles 1 <b>289-617</b> 40 poles 1 <b>289-618</b> 50 poles 1 <b>289-619</b> 64 poles 1
	<b>2 Relays, with 1 changeover contact each, relay direct soldered</b> <b>288-758</b> 1 UC 24 V / 6 A  <b>288-761</b> 1 UC 115 V / 6 A  <b>288-762</b> 1 AC 230 V / 6 A		<b>Interface module with D-subminiature male connector</b> For mating connectors with solder connection: <b>289-545</b> 9 poles 1 <b>289-546</b> 15 poles 1 <b>289-547</b> 25 poles 1 <b>289-548</b> 37 poles 1 <b>289-549</b> 50 poles 1		<b>Interface module with D-Sub header</b> <b>289-720</b> 9-poles 1 <b>289-721</b> 15 poles 1 <b>289-722</b> 25 poles 1 <b>289-723</b> 37 poles 1
	<b>4 Relays, with 1 make contact each</b> Relay direct soldered <b>287-474</b> 1 DC 24 V / 16 A		<b>Interface module with D-subminiature female connector</b> For mating connectors with IDC: <b>289-540</b> 9 poles 1 <b>289-541</b> 15 poles 1 <b>289-542</b> 25 poles 1 <b>289-543</b> 37 poles 1 <b>289-544</b> 50 poles 1		<b>Interface module with D-subminiature female connector</b> <b>289-725</b> 9 poles 1 <b>289-726</b> 15 poles 1 <b>289-727</b> 25 poles 1 <b>289-728</b> 37 poles 1
	<b>4 Relays, with 1 changeover contact each</b> Relay in socket <b>287-774</b> 1 DC 24 V / 6 A		<b>Interface module with D-subminiature female connector</b> For mating connectors with solder connection: <b>289-555</b> 9 poles 1 <b>289-556</b> 15 poles 1 <b>289-557</b> 25 poles 1 <b>289-558</b> 37 poles 1 <b>289-559</b> 50 poles 1		
	<b>8 Relays, with 1 changeover contact each</b> Relay in socket <b>287-834</b> 1 UC 24 V / 6 A  <b>287-824</b> 1 DC 24 V / 6 A (no illustration)		<b>Interface module with D-subminiature female connector</b> For mating connectors with IDC: <b>289-550</b> 9 poles 1 <b>289-551</b> 15 poles 1 <b>289-552</b> 25 poles 1 <b>289-553</b> 37 poles 1 <b>289-554</b> 50 poles 1		
	<b>16 Relays, with 1 changeover contact each</b> Relay in socket <b>287-853</b> 1 DC 12 V / 6 A  <b>287-854</b> 1 DC 24 V / 6 A  (no illustration)				Also available for connectors complying with: DIN 41612 Type E, F DIN 41651