



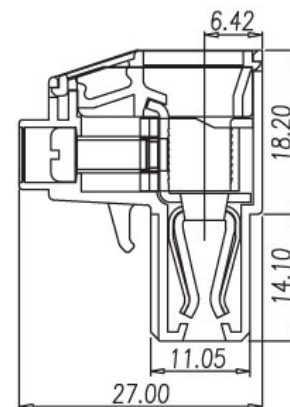

**EC880V**

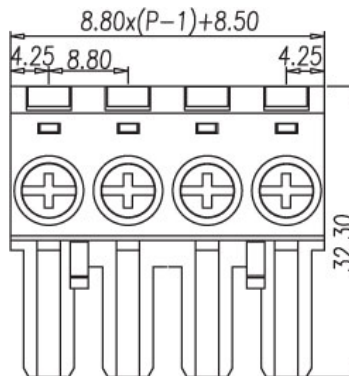

**Pitch: 8.80mm**

Approval	<b>RAI</b>	
Technical Data	UL	IEC
Rated voltage	600V	750V
Rated current	30A	57A
Wire range		10mm <sup>2</sup>
Solid wire (AWG)	18~8	
Stranded wire (AWG/mm <sup>2</sup> )	18~8	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / 5 KV	
Torque (Lb-in)	20.8	
Screw	M4	
Wire strip length	8~9mm	
Pole	Cat. No.	
02	EC880V-02P	
:	:	
:	:	
12	EC880V-12P	