




ESC250V

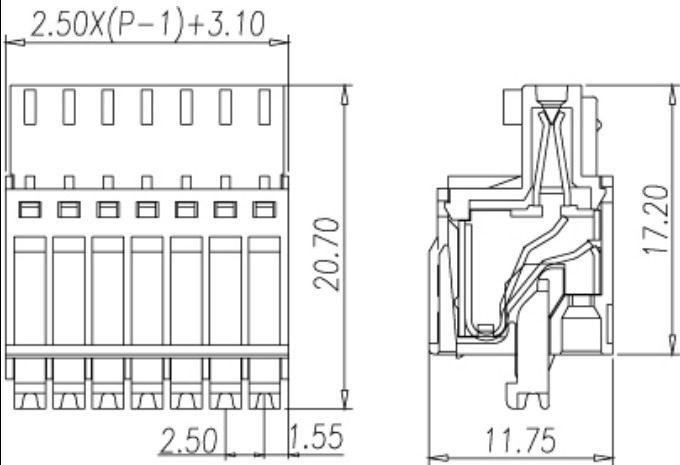

Pitch: 2.50mm

| | | |
|--------------------------------------|-----------------|--------------------|
| Approval | | |
| Technical Data | UL | IEC |
| Rated voltage | 150V | 130V |
| Rated current | 4A | 4A |
| Wire range | | 0.5mm ² |
| Solid wire (AWG) | 28~20 | |
| Stranded wire (AWG/mm ²) | | |
| Rated surge voltage (UL/IEC/Max.) | 1.3 / 1.25 / KV | |
| Torque (Lb-in) | | |
| Screw | | |
| Wire strip length | 8~9mm | |
| Pole | Cat. No. | |
| 02 | ESC250V-02P | |
| : | : | |
| : | : | |
| 24 | ESC250V-24P | |