
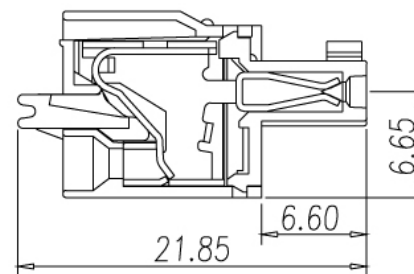


## ESC508V



Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range	1.5mm <sup>2</sup>	
Solid wire (AWG)	28~14	
Stranded wire (AWG/mm <sup>2</sup> )	28~14	
Rated surge voltage (UL/IEC/Max.)	1.3 / 1.25 / KV	
Torque (Lb-in)		
Screw		
Wire strip length	7~8mm	
Pole	Cat. No.	
02	ESC508V-02P	
:	:	
:	:	
24	ESC508V-24P	