



Clamp Spring - Spring type terminal blocks / WK&SC series

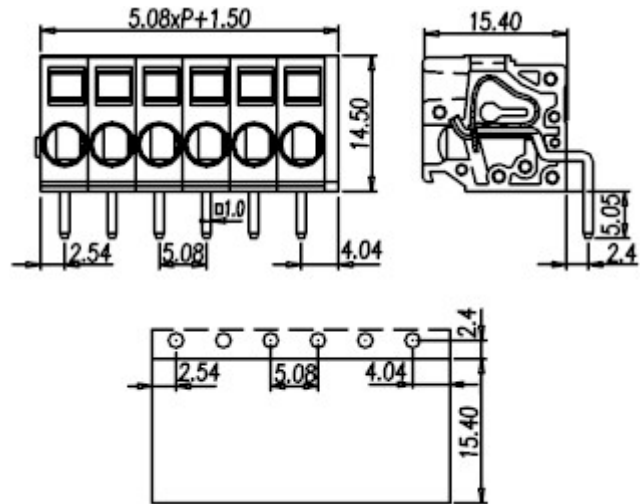

SC508R

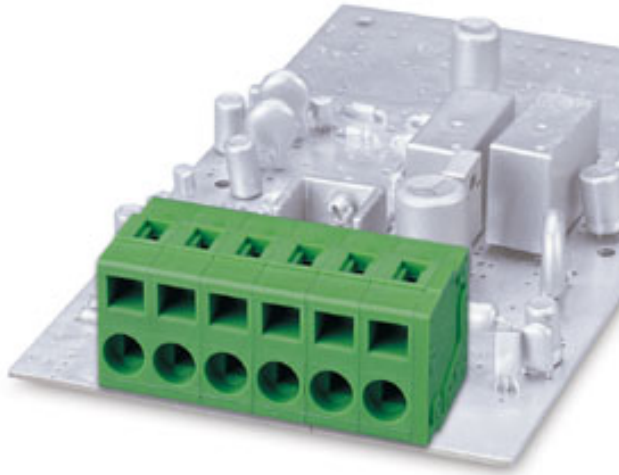

Pitch: 5.08mm

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	14A	12A
Wire range		1.5mm ²
Solid wire (AWG)	28-14	
Stranded wire (AWG/mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	8-9mm	
Pole	Cat. No.	
02	SC508R-02P	
03	SC508R-03P	
04	SC508R-04P	
05	SC508R-05P	
06	SC508R-06P	
07	SC508R-07P	
08	SC508R-08P	
09	SC508R-09P	
10	SC508R-10P	



11	SC508R-11P
12	SC508R-12P
-	--
--	--

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw