









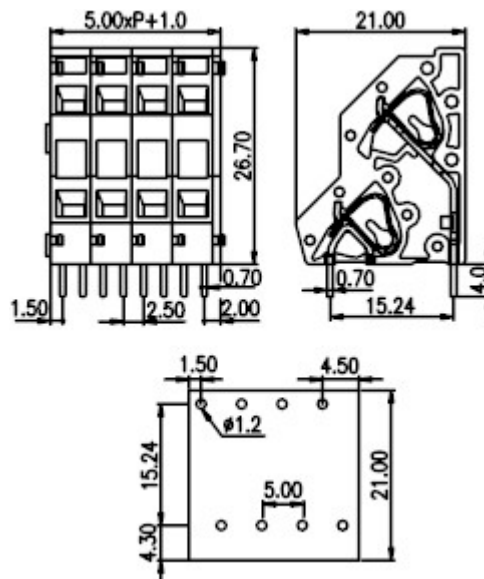

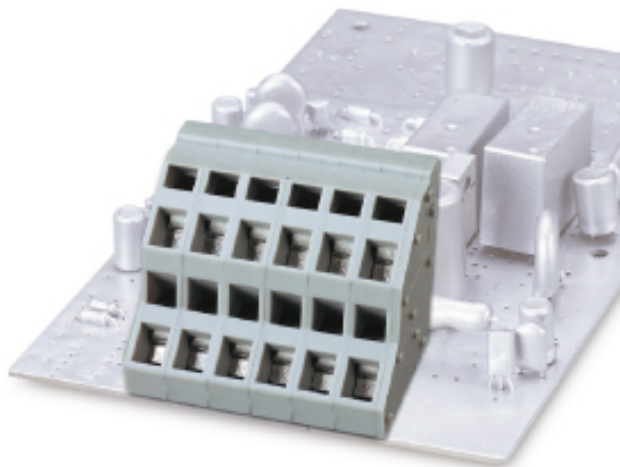


WKK500



Pitch: 5.00mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	2.5mm ²	
Solid wire (AWG)	28-12	
Stranded wire (AWG/mm ²)	28-12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	6-7mm	
Single Pole	Cat. No.	
	WKK500-02X	
End Cover	WKK500C	
Optional color	Cat. No.	
●	WKK500-02X	
●	WKK500-02X-GN	
●	WKK500-02X-RD	
●	WKK500-02X-BL	
●	WKK500-02X-BK	
●	WKK500-02X-OR	

Pole	Cat. No.
04	WKK500-04P
06	WKK500-06P
08	WKK500-08P
10	WKK500-10P
12	WKK500-12P
14	WKK500-14P
16	WKK500-16P
18	WKK500-18P
20	WKK500-20P
22	WKK500-22P
24	WKK500-24P
-	--
-	--

Optional color	Cat. No.
	WKK500-XXP
	WKK500-XXP-GN
	WKK500-XXP-RD
	WKK500-XXP-BL
	WKK500-XXP-BK
	WKK500-XXP-OR