






Clamp Spring - Spring type terminal blocks / WK series

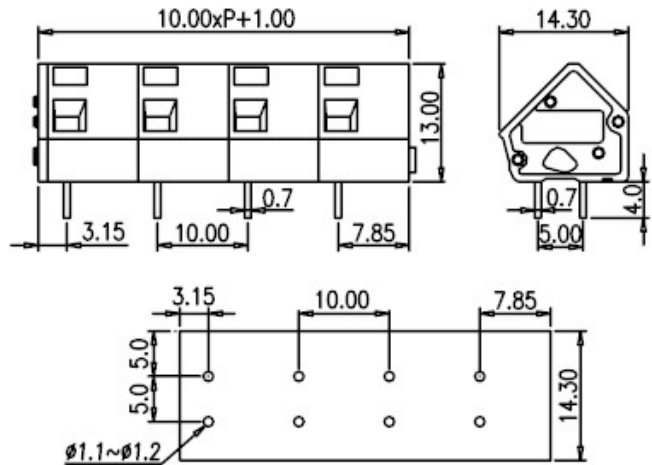

WKA100

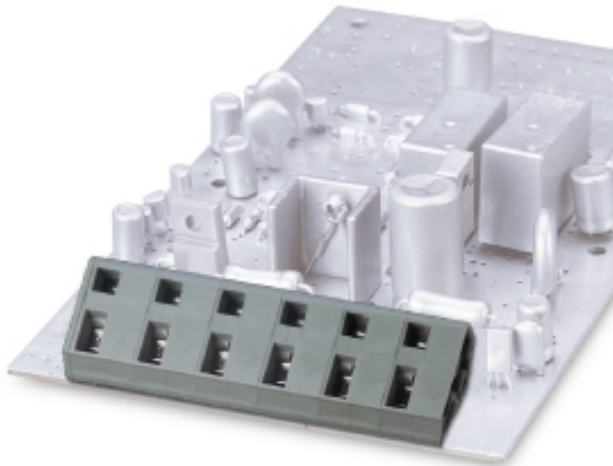







Pitch: 10.00mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	15A / 5A	24A
Wire range	2.5mm ²	
Solid wire (AWG)	28~12	
Stranded wire (AWG/mm ²)	28~12	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / 4 KV	
Wire strip length	6~7mm	
Single Pole	Cat. No.	
	WKA100-01X	
End Cover	WKA500C	
Optional color	Cat. No.	
●	WKA100-01X	
●	WKA100-01X-GN	
●	WKA100-01X-RD	
●	WKA100-01X-BL	
●	WKA100-01X-BK	
●	WKA100-01X-OR	



Pole	Cat. No.
02	WKA100-02P
03	WKA100-03P
04	WKA100-04P
05	WKA100-05P
06	WKA100-06P
07	WKA100-07P
08	WKA100-08P
09	WKA100-09P
10	WKA100-10P
11	WKA100-11P
12	WKA100-12P
-	--
-	--

Optional color	Cat. No.
	WKA100-XXP
	WKA100-XXP-GN
	WKA100-XXP-RD
	WKA100-XXP-BL
	WKA100-XXP-BK
	WKA100-XXP-OR

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw