









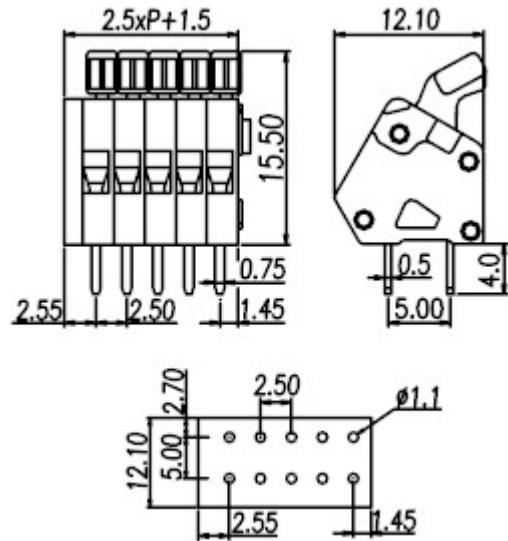

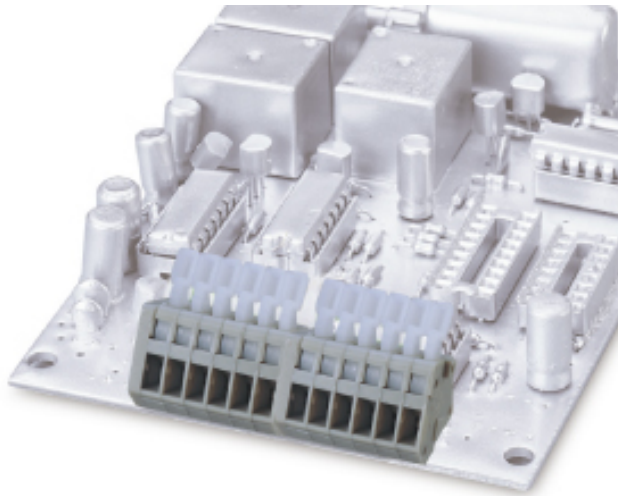


WKA250A



Pitch: 2.50mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	4A	6A
Wire range		0.5mm ²
Solid wire (AWG)	28~20	
Stranded wire (AWG/mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 2 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA250A-01X	
End Cover	WKA250AC	
Optional color	Cat. No.	
●	WKA250A-01X	
●	WKA250A-01X-GN	
●	WKA250A-01X-RD	
●	WKA250A-01X-BL	
●	WKA250A-01X-BK	
●	WKA250A-01X-OR	

Pole	Cat. No.
02	WKA250A-02P
03	WKA250A-03P
04	WKA250A-04P
05	WKA250A-05P
06	WKA250A-06P
07	WKA250A-07P
08	WKA250A- 08P
09	WKA250A- 09P
10	WKA250A-10P
11	WKA250A-11P
12	WKA250A-12P
-	--
-	--

Optional color	Cat. No.
	WKA250A-XXP
	WKA250A-XXP-GN
	WKA250A-XXP-RD
	WKA250A-XXP-BL
	WKA250A-XXP-BK
	WKA250A-XXP-OR