







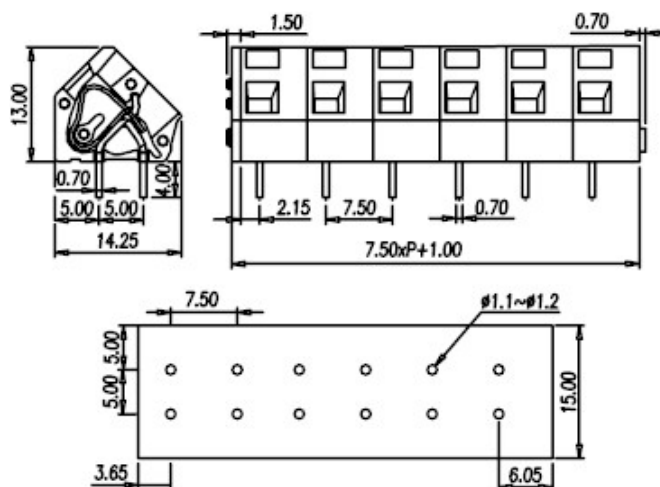

WKA750

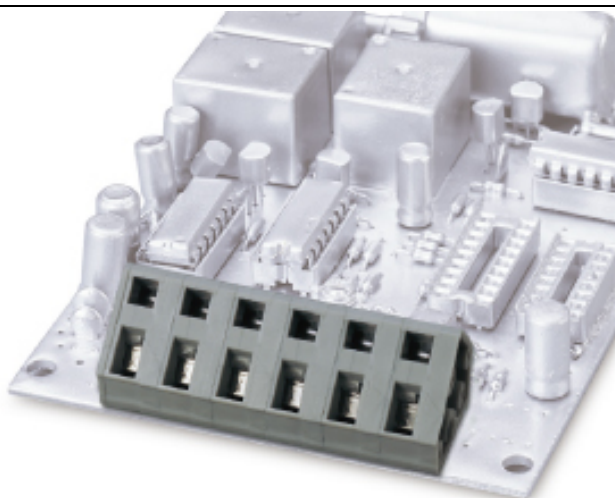

Pitch: 7.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	2.5mm ²	
Solid wire (AWG)	28-12	
Stranded wire (AWG/mm ²)	28-12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 4 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA750-01X	
End Cover	WKA500C	
Optional color	Cat. No.	
●	WKA750-01X	
●	WKA750-01X-GN	
●	WKA750-01X-RD	
●	WKA750-01X-BL	
●	WKA750-01X-BK	
●	WKA750-01X-OR	

Pole	Cat. No.
02	WKA750-02P
03	WKA750-03P
04	WKA750-04P
05	WKA750-05P
06	WKA750-06P
07	WKA750-07P
08	WKA750-08P
09	WKA750-09P
10	WKA750-10P
11	WKA750-11P
12	WKA750-12P
-	--
-	--

Optional color	Cat. No.
	WKA750-XXP
	WKA750-XXP-GN
	WKA750-XXP-RD
	WKA750-XXP-BL
	WKA750-XXP-BK
	WKA750-XXP-OR