






Clamp Spring - Spring type terminal blocks / WK series



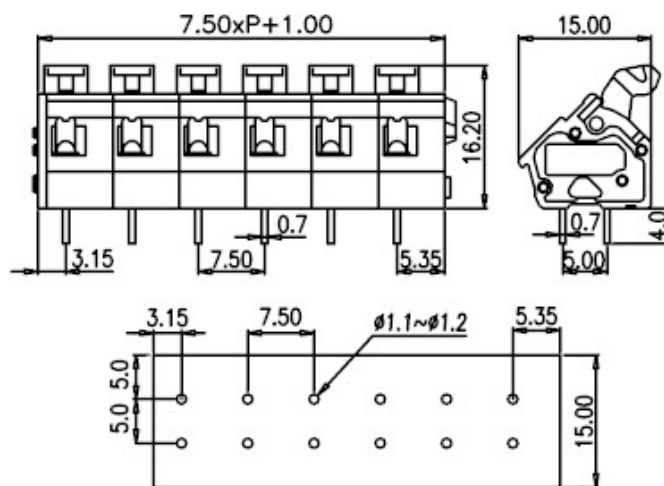

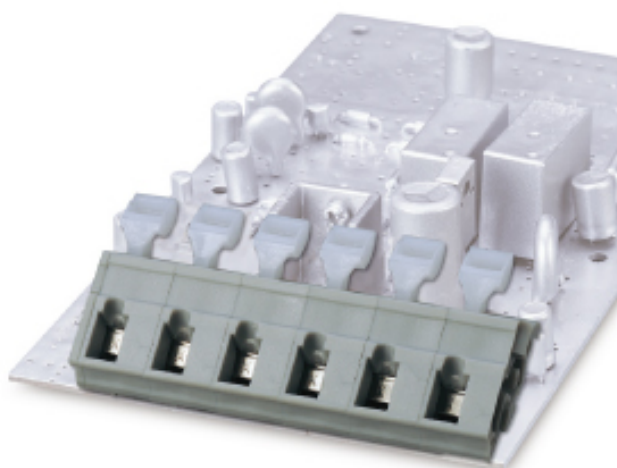



WKA750A



Pitch: 7.50mm

| | | |
|--------------------------------------|---|------|
| Approval |    | |
| Technical Data | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 15A | 24A |
| Wire range | 2.5mm ² | |
| Solid wire (AWG) | 28~12 | |
| Stranded wire (AWG/mm ²) | 28~12 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2.5 / 4 KV | |
| Wire strip length | 5~6mm | |
| Single Pole | Cat. No. | |
| | WKA750A-01X | |
| End Cover | WKA500AC | |
| Optional color | Cat. No. | |
| ● | WKA750A-01X | |
| ● | WKA750A-01X-GN | |
| ● | WKA750A-01X-RD | |
| ● | WKA750A-01X-BL | |
| ● | WKA750A-01X-BK | |
| ● | WKA750A-01X-OR | |

| Pole | Cat. No. |
|--|----------------|
| 02 | WKA750A-02P |
| 03 | WKA750A-03P |
| 04 | WKA750A-04P |
| 05 | WKA750A-05P |
| 06 | WKA750A-06P |
| 07 | WKA750A-07P |
| 08 | WKA750A-08P |
| 09 | WKA750A-09P |
| 10 | WKA750A-10P |
| 11 | WKA750A-11P |
| 12 | WKA750A-12P |
| - | -- |
| - | -- |
| Optional color | Cat. No. |
|  | WKA750A-XXP |
|  | WKA750A-XXP-GN |
|  | WKA750A-XXP-RD |
|  | WKA750A-XXP-BL |
|  | WKA750A-XXP-BK |
|  | WKA750A-XXP-OR |