









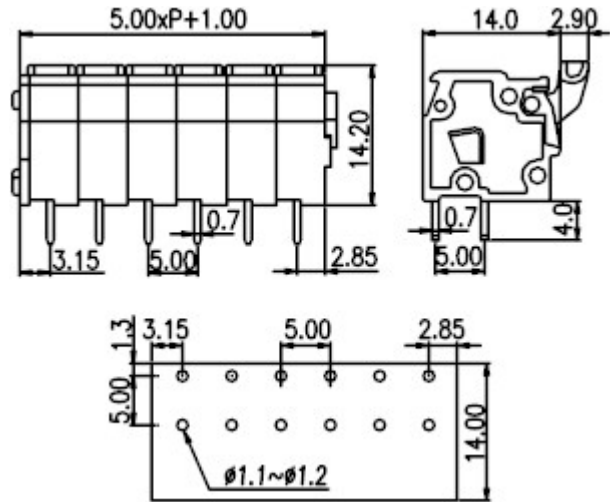

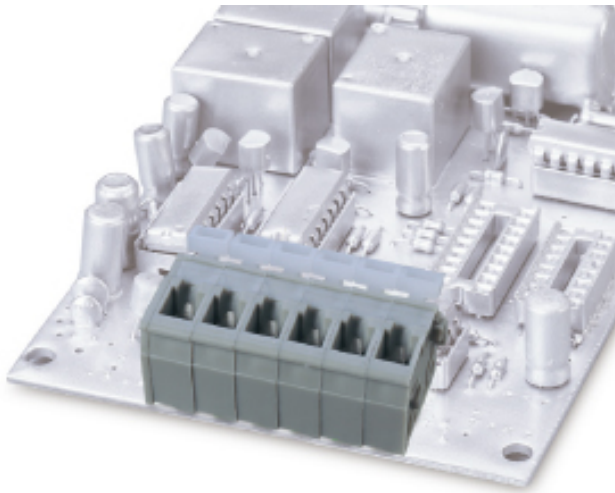


WKV500A



Pitch: 5.00mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	2.5mm ²	
Solid wire (AWG)	28~12	
Stranded wire (AWG/mm ²)	28~12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKV500A-01X	
End Cover	WKV500AC	
Optional color	Cat. No.	
●	WKV500A-01X	
●	WKV500A-01X-GN	
●	WKV500A-01X-RD	
●	WKV500A-01X-BL	
●	WKV500A-01X-BK	
●	WKV500A-01X-OR	

Pole	Cat. No.
02	WKV500A-02P
03	WKV500A-03P
04	WKV500A-04P
05	WKV500A-05P
06	WKV500A-06P
07	WKV500A-07P
08	WKV500A-08P
09	WKV500A-09P
10	WKV500A-10P
11	WKV500A-11P
12	WKV500A-12P
-	--
-	--
Optional color	Cat. No.
	WKV500A-XXP
	WKV500A-XXP-GN
	WKV500A-XXP-RD
	WKV500A-XXP-BL
	WKV500A-XXP-BK
	WKV500A-XXP-OR