









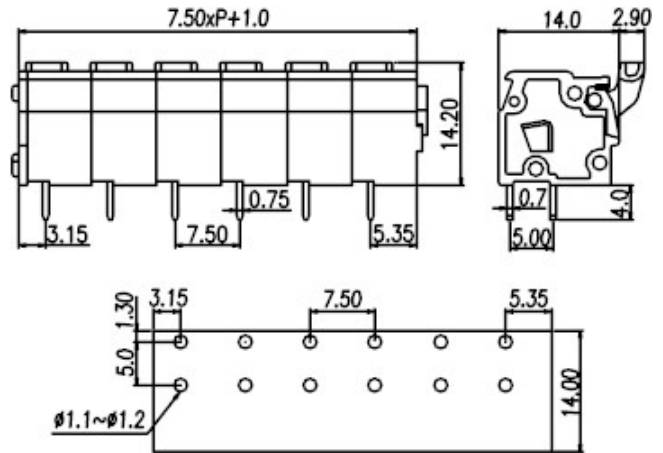

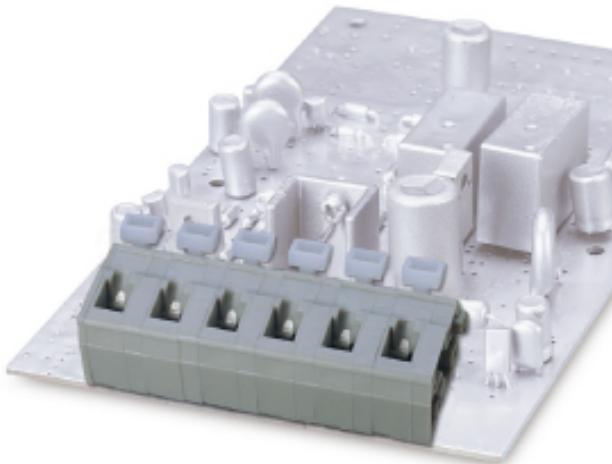


## WKV750A



**Pitch: 7.50mm**

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range		2.5mm <sup>2</sup>
Solid wire (AWG)	28~12	
Stranded wire (AWG/mm <sup>2</sup> )	28~12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKV750A-01X	
End Cover	WKV500AC	
Optional color	Cat. No.	
●	WKV750A-01X	
●	WKV750A-01X-GN	
●	WKV750A-01X-RD	
●	WKV750A-01X-BL	
●	WKV750A-01X-BK	
●	WKV750A-01X-OR	

Pole	Cat. No.
02	WKV750A-02P
03	WKV750A-03P
04	WKV750A-04P
05	WKV750A-05P
06	WKV750A-06P
07	WKV750A-07P
08	WKV750A-08P
09	WKV750A-09P
10	WKV750A-10P
11	WKV750A-11P
12	WKV750A-12P
-	--
-	--
Optional color	Cat. No.
	WKV750A-XXP
	WKV750A-XXP-GN
	WKV750A-XXP-RD
	WKV750A-XXP-BL
	WKV750A-XXP-BK
	WKV750A-XXP-OR