

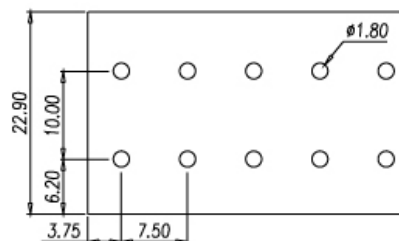


# Clamp Spring - Spring type terminal blocks / WSK series

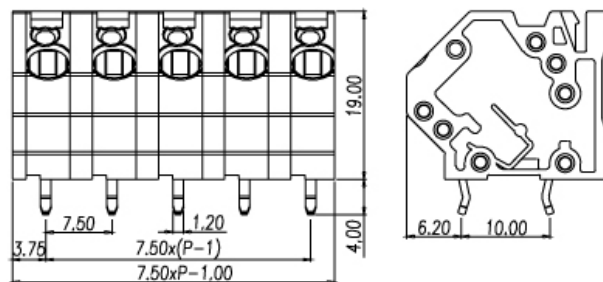

## WSKA500-..P1

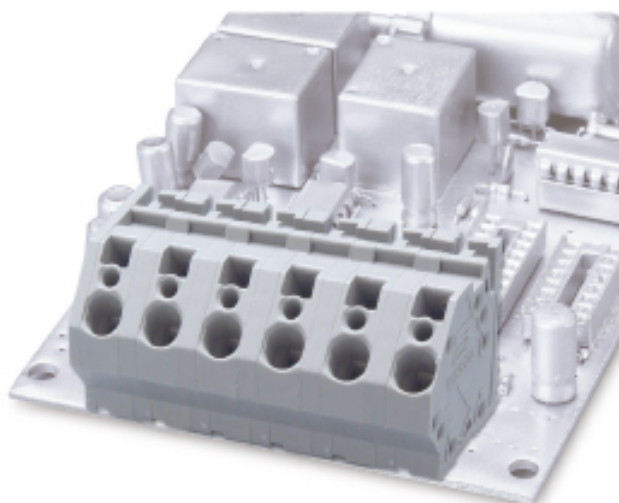

**Pitch: 7.50mm**

Approval	<Pending>	
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	15A	24A
Wire range		4mm <sup>2</sup>
Solid wire (AWG)	28-12	
Stranded wire (AWG)	28-12	
Insulation voltage (UL/IEC/Max.)	1.6 / / KV	
Wire strip length	10-11mm	
End Cover		
Pole	Cat. No.	
01	WSKA500-01P1	
02	WSKA500-02P1	
03	WSKA500-03P1	
:	:	