



# Clamp Spring - Spring type terminal blocks / WSK series

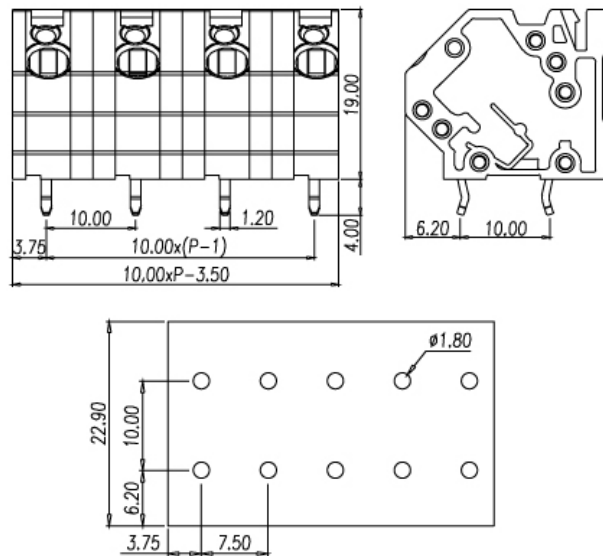

## WSKA500-..P2

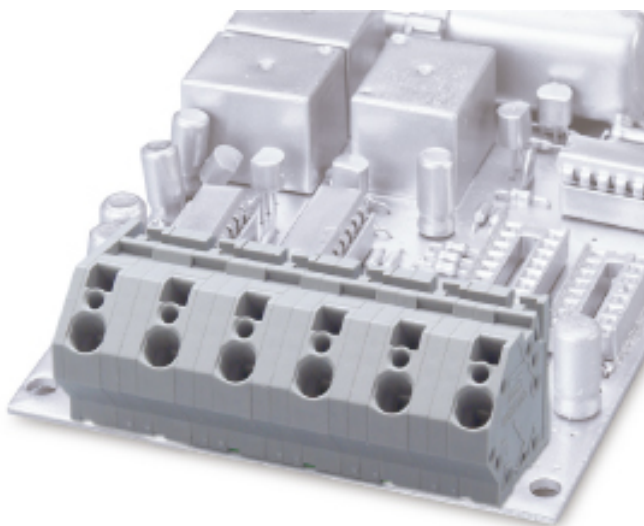

**Pitch: 10.00mm**

Approval	<Pending>	
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	15A	24A
Wire range		4mm <sup>2</sup>
Solid wire (AWG)	28~12	
Stranded wire (AWG)	28~12	
Insulation voltage (UL/IEC/Max.)	1.6(2.2) / / KV	
Wire strip length	10~11mm	
End Cover		
Pole	Cat. No.	
01	WSKA500-01P2	
02	WSKA500-02P2	
03	WSKA500-03P2	
:	:	